


# JioFi


5 steps  
to be connected  
everywhere.



# 1 Know your JioFi

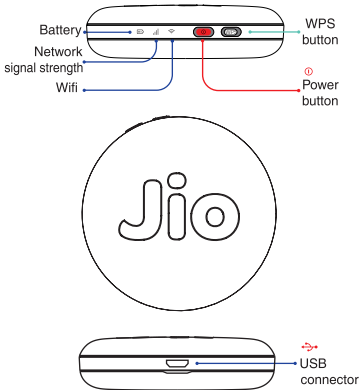

- 2** Open the back cover and locate the SIM / SD card slot. To open the tray lift it up. Insert the SIM or SD card and make sure they are placed properly with the chip facing down.



- 3** Remember or write down the SSID (Service Set Identifier) and Password mentioned in the battery compartment before inserting the battery and replacing cover.



- 4** The Setup is done. Now Turn ON your device and connect up to 31 devices on your wireless network by using the SSID and password.



Press the WPS button for 3 seconds on the device and open “Connect WPS” function by user’s phone, then user can connect to the wireless router.

Warning: During the installation process, do not remove or unplug the device.




- 5** Welcome to your digital life. Download Jio4GVoice on your 2G/3G phone to enable HD Voice and Video calling using your JioFi.

# About your device

## Charging your device

When charging the battery for the first time, it is recommended to charge it to 100% with the device in turned OFF state.



### Charging Time

USB	~ Approx 6 hrs
Power adaptor	~ Approx 3 hrs 30 mins

### Battery life on LTE\*

\*Depends on network conditions

Stand by time	~ 400 hrs
Running time	~ 10 hrs


## Turning the device ON or OFF

To turn ON the device, press and hold the Power key for 2 seconds.









To turn OFF the device, press and hold the Power key for 4 seconds.

## Resetting the device

Occasionally, you may need to perform a hardware reset to factory default settings when your device works abnormally. To reset the device by pressing the reset button for 5 seconds.



# Indicators

Battery		Solid	Battery high/AC adaptor connected without battery inside
		Slow blinking	Charging while Battery is high
		Solid Slow blinking	Battery medium Charging while Battery is medium
		Solid Slow blinking	Battery low Charging while Battery is low
Network signal strength		Solid	Good signal coverage
		Solid	Fair signal coverage
		Solid Slow blinking	Poor signal coverage No sim card / sim card error / No service
WiFi		Solid Slow blinking	WiFi on but no devices connected Sleep mode
		Solid Blinking	1 or more devices connected WPS active
		Off	WiFi off

**In case the device goes into sleep mode, short press the power button to bring it back to active state.**



# Manage your Device

## Use the Web Configuration utility

Change the network name (SSID), the Security Mode and Key, configure the sleep mode, etc.

- 1 Connect your Computer/Smartphone to your JioFi device over USB/WiFi interface.
- 2 Type <http://jiofi.local.html> in the address bar of the browser and press enter.
- 3 Click the login button on the top right corner and use "administrator" as username and password to access the homepage of Web Configuration utility.
- 4 Customize network, wifi and other parameters and access SD card over wifi using the web configuration utility.
- 5 If the web configuration utility is not available download the MyJio app or visit [www.jio.com](http://www.jio.com) and access the 'Managed devices' section to manage your device.
- 6 Certain end user applications, for instance, Online Console Gaming and Online streaming (e.g: DVR) need certain ports to be opened. Kindly check for Gaming and Apps Management Tab in Web Configuration Utility. For more information and further help, please contact Jio Care.

# For fast support

## **A user cannot access the Internet**

Please check if the user is connected to JioFi SSID. Make sure your SIM card is properly inserted. Check if your JioFi is connected to the network. Ensure your SIM card is activated and has adequate data balance available.

## **Not able to change my device settings**

Please connect to your JioFi device. Enter <http://jiofi.local.html> in the browser's URL input field. Click on the 'Login' button on the top right corner of your webpage screen. The default username and password is 'administrator'. You can also visit the Managed device section through your MyJio app or web portal.

## **Cannot establish a WiFi connection**

Please make sure the WiFi function is active on your JioFi. Refresh the network list and select the correct SSID. Type the correct network key (WiFi password) when you connect to the device.

# Safety

## To the Owner

Always keep the device at a distance of 20 cm from medical devices like hearing aids, pacemakers as it may interfere when the device is turned on.

It is advisable to consult your physician or the manufacturer of the medical device before using your device.

Avoid using device in areas with high electromagnetic radiations.

Be aware of the usage limitation when using your device at places such as aircrafts, petrol stations, hospitals, oil warehouses or chemical factories, where there are explosives gases or explosive products being processed. Turn off your device if required.

Do not open and touch the inner area of your device, as it may affect your device performance.

Keep the device out of children's reach. Your device may cause injury if used as a toy.

Do not touch metallic parts of your device, as they may become hot when the device is working.

## Using your Device

Use only original and authorised accessories

Unauthorised accessories may affect your device performance.

Do not expose your device to moisture or water.

Handle carefully, Do not drop!

## Battery Usage precautions

DO NOT - short circuit or try to disassemble the battery as it may cause fire.

Always store battery in cool dry place.

Always use genuine and authorised charger to charge the battery.

Replace worn out battery with authorised and genuine battery.

Dispose worn out battery in an appropriate way.

Battery to be used for intended purpose only.

Rohs and Disposal

## Technical specifications

This product is RoHS compliant

Do not dispose with household waste.



# Information

## Technical specifications

### General

Supported OS	USB plug and play (RNDIS) supported on Windows XP SP3 onwards/Vista/Win7/Win8/Win10/Linux/MAC
Input voltage	5V
Output voltage	4.35V Maximum
Maximum power consumption	3.5W
Memory	eMCP: 2Gbits ROM and 2Gbits RAM
External interfaces	Micro-USB port Nano-SIM card Micro-SD card (up to 32GB)
Operating Temp. charge	Charging: 0°C~+45°C Discharge: -20°C~+60°C
Dimensions (LxWxH)	74x74x20mm
No. of device supported	31 (WIFI) + 1 (USB tethering)

### Bands

Standards compliance	WAN: (2300/1800/850MHz) WLAN: IEEE 802.11b/g/n
----------------------	---

### Battery

Rated capacity	3000 mAh
Maximum battery voltage	4.35V

### Power adaptor

Input power supply AC	100~240V
Output power supply DC	5V

### Environmental

Ambient temperature	Operating: 0°C~+40°C Storage: -20°C~+70°C
Humidity	5% to 95% (non-condensing)

# With love, from Jio

## Reach us

If you have further questions or require personal assistance, please contact JioCare by calling or sending an email.



198 from your Jio number  
or 1800-88-99999 from any  
network (24 Hrs.)



[care@jio.com](mailto:care@jio.com)



Visit [www.jio.com](http://www.jio.com)

**We wish you a beautiful experience  
with Jio.**